

DE2 Electronics 2

Tutorial 4

Lab 3 Explained


Prof Peter YK Cheung

Dyson School of Design Engineering

URL: www.ee.ic.ac.uk/pcheung/teaching/DE2_EE/


E-mail: p.cheung@imperial.ac.uk

Bulb Board

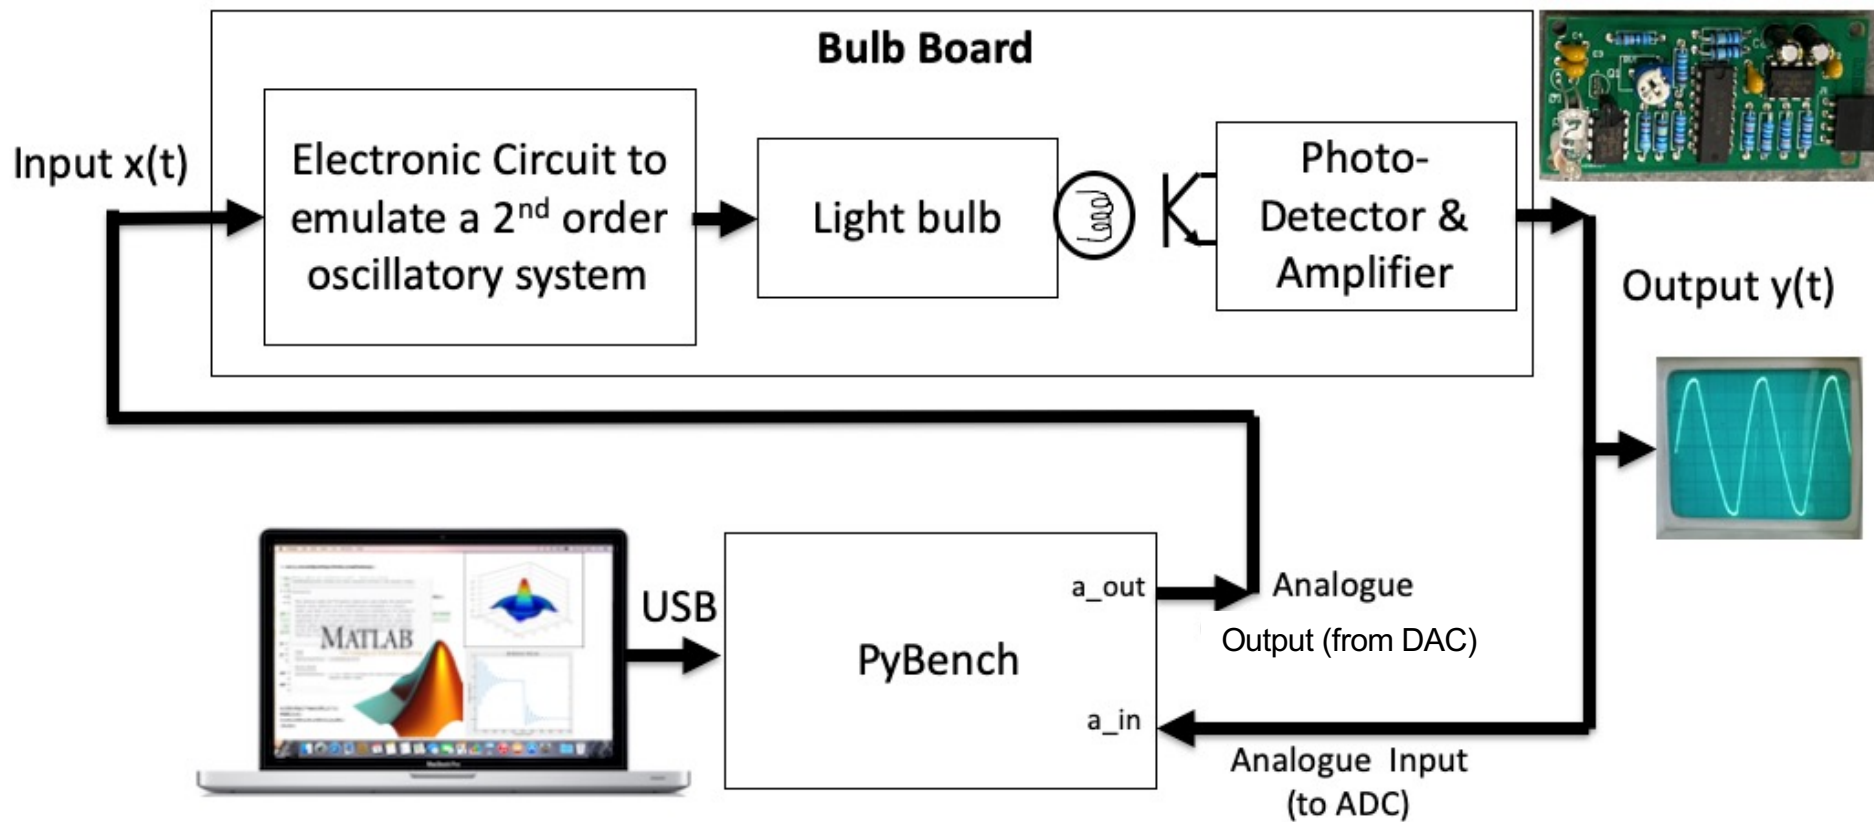

- ◆ We are interested in mathematical modelling system.
- ◆ Bulb Board is designed to behave like a 2nd order system + a non-linear system with some delay (the light bulb)
- ◆ We want to verify that the mathematical model is a good representation.
- ◆ We also want to explore the limitations of this model


Bulb Board Circuit Schematic

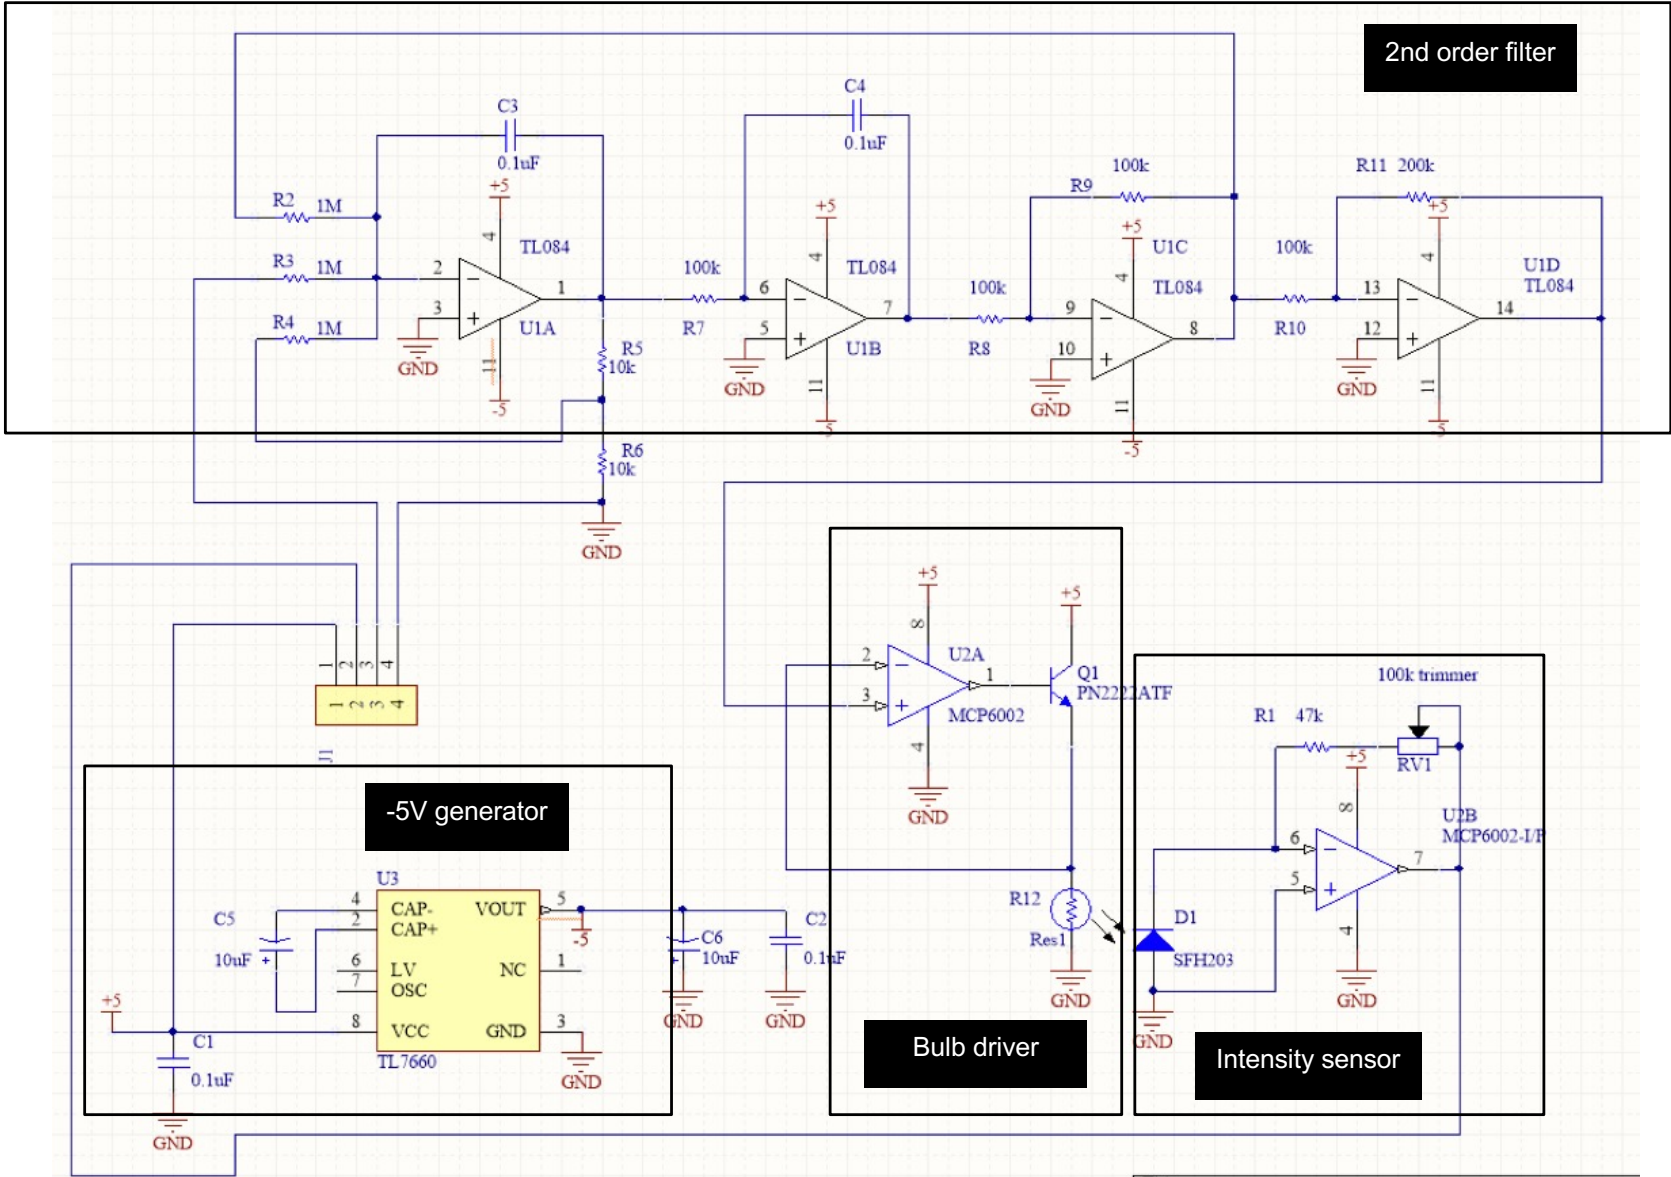


Key aspects of Lab 3

1. DC characteristic – no time variation. Measure light intensities at different drive voltages.
2. Steady state response to sinusoidal signals at different frequencies – we call this **frequency response $H(j\omega)$** .
3. Use of Matlab for modelling and simulation using **transfer function $H(s)$** .
4. Transient behaviour of the system – we call this **step response**.
5. Impact of **non-linearity** in the system.

Task 1 – DC Characteristic

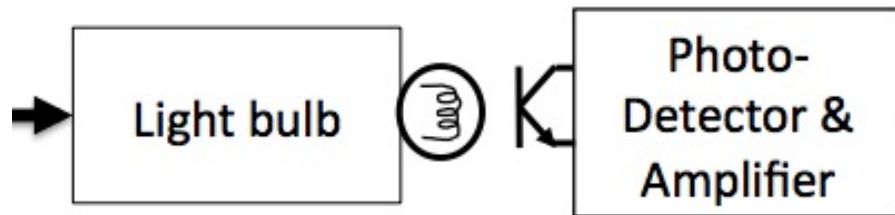


- ◆ $y = F(x)$
- ◆ F is a non-linear function.
- ◆ F is a quadratic function because:
light intensity $\propto x^2$
- ◆ Light is dependent temperature of filament in bulb
- ◆ Temperature is dependent on power to bulb
- ◆ Power is proportional to x^2 .

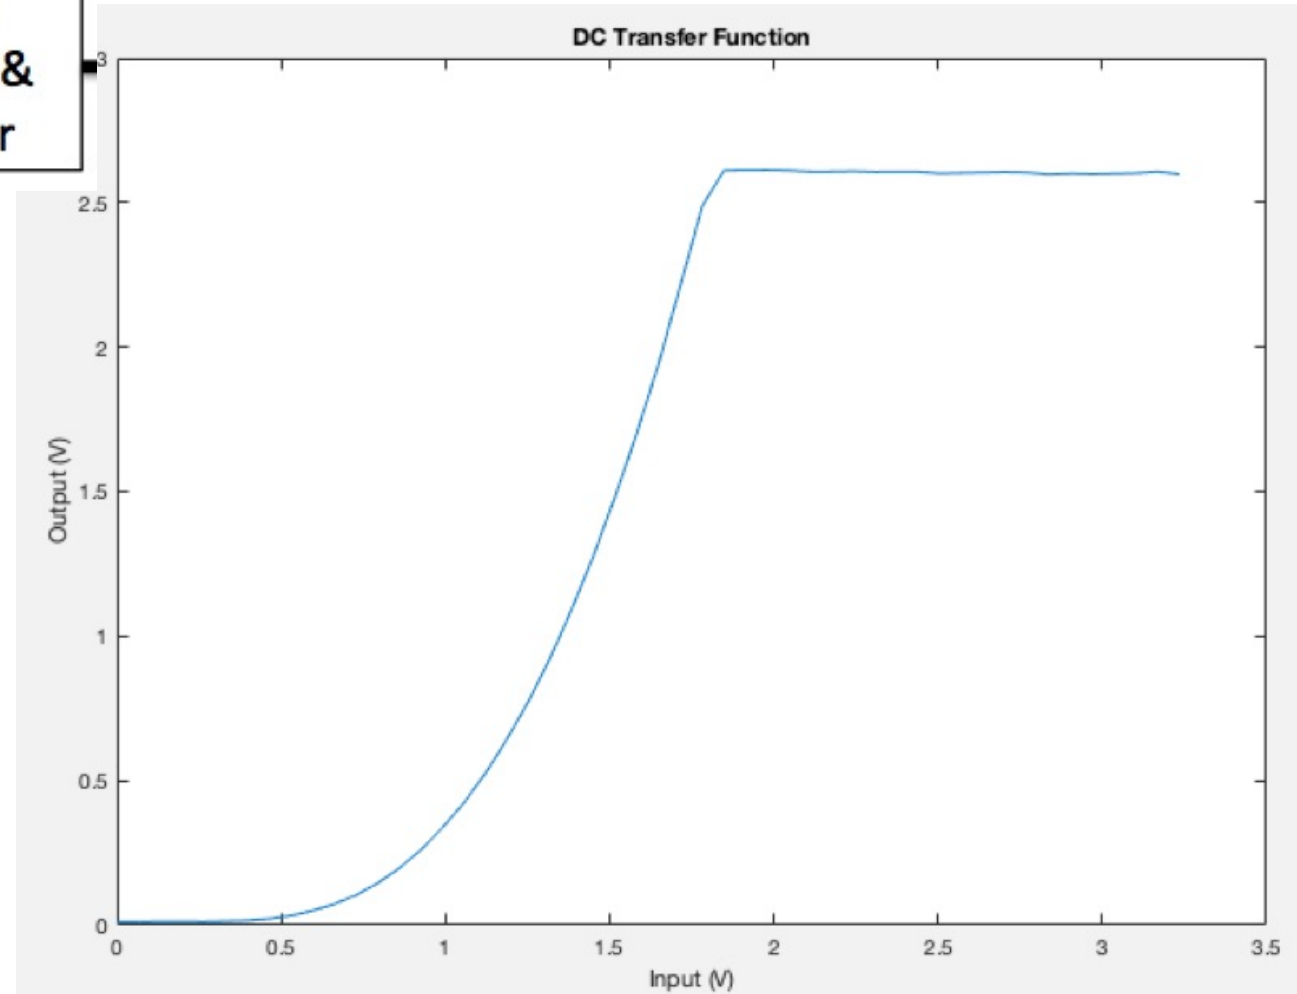


Task 1 – Solution

```
1 % Lab 3 – Task 1 DC characteristics of the Bulb Boardl
2 clear all
3 ports = serialportlist;
4 pb = PyBench(ports(end)); % cre
5
6 % measure the steady-state DC o
7 pb.samp_freq = 200;
8 NSTEPS=50;
9 input = zeros(NSTEPS,1);
10 output = zeros(NSTEPS,1);
11 tic
12 disp('Sweeping DC output for DC
13 for i = [1:NSTEPS]
14     v = (i-1)*3.3/NSTEPS;
15     input(i) = v;
16     pb.dc(v);
17     pause(0.5);
18     data = pb.get_block(10);
19     output(i) = mean(data);
20 end
21 pb.dc(0.0);
22 toc
23 plot(input,output)
24 xlabel('Input (V)');
25 ylabel('Output (V)');
26 title('DC Transfer Function');
27 fclose(instrfind());
```

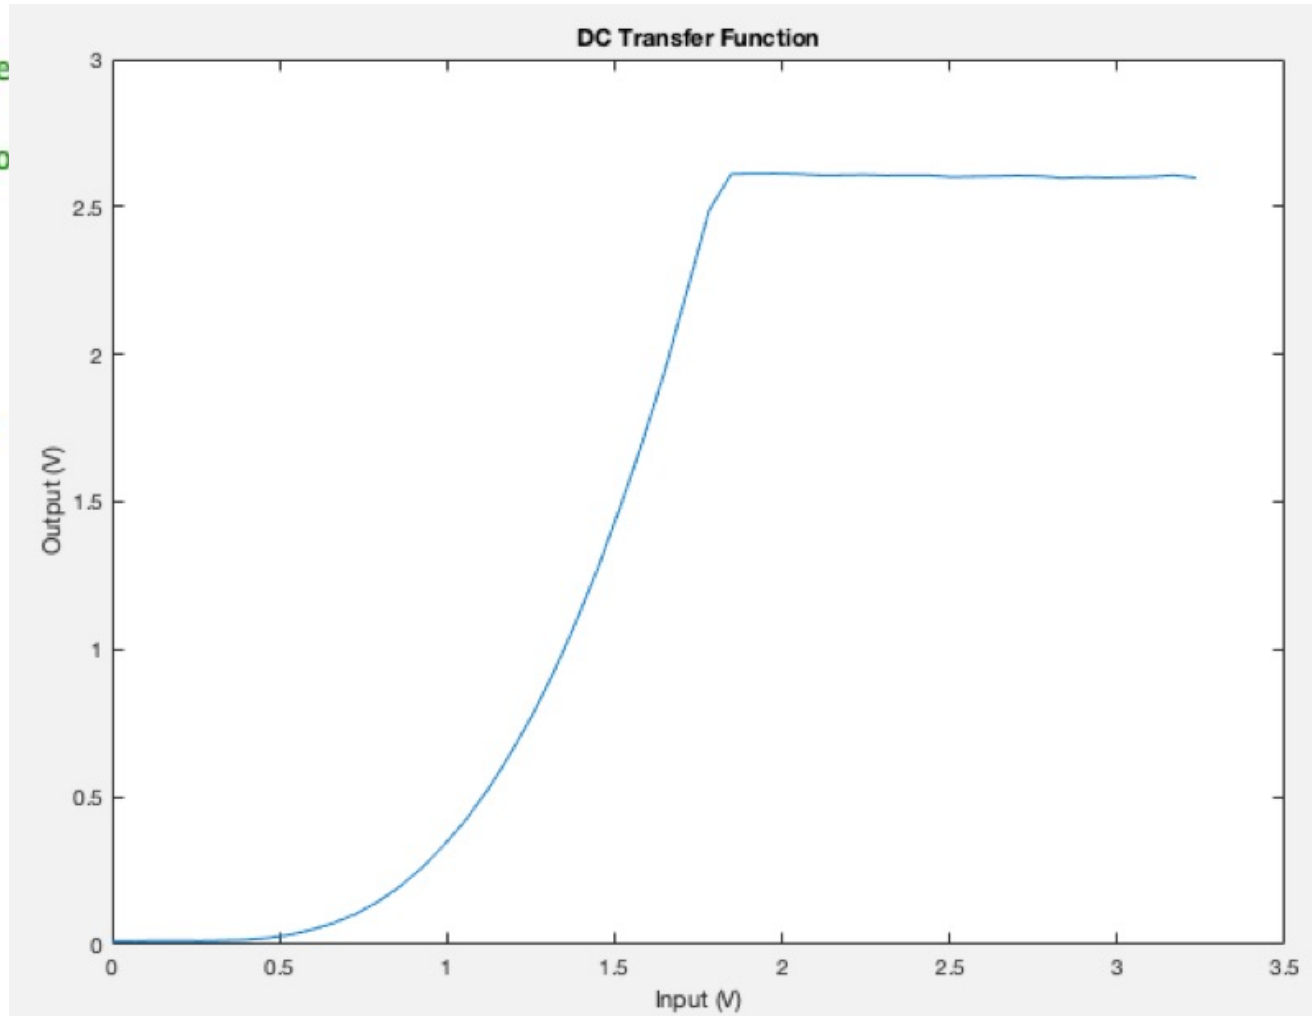

Task 2 – Modeling dynamics in a system

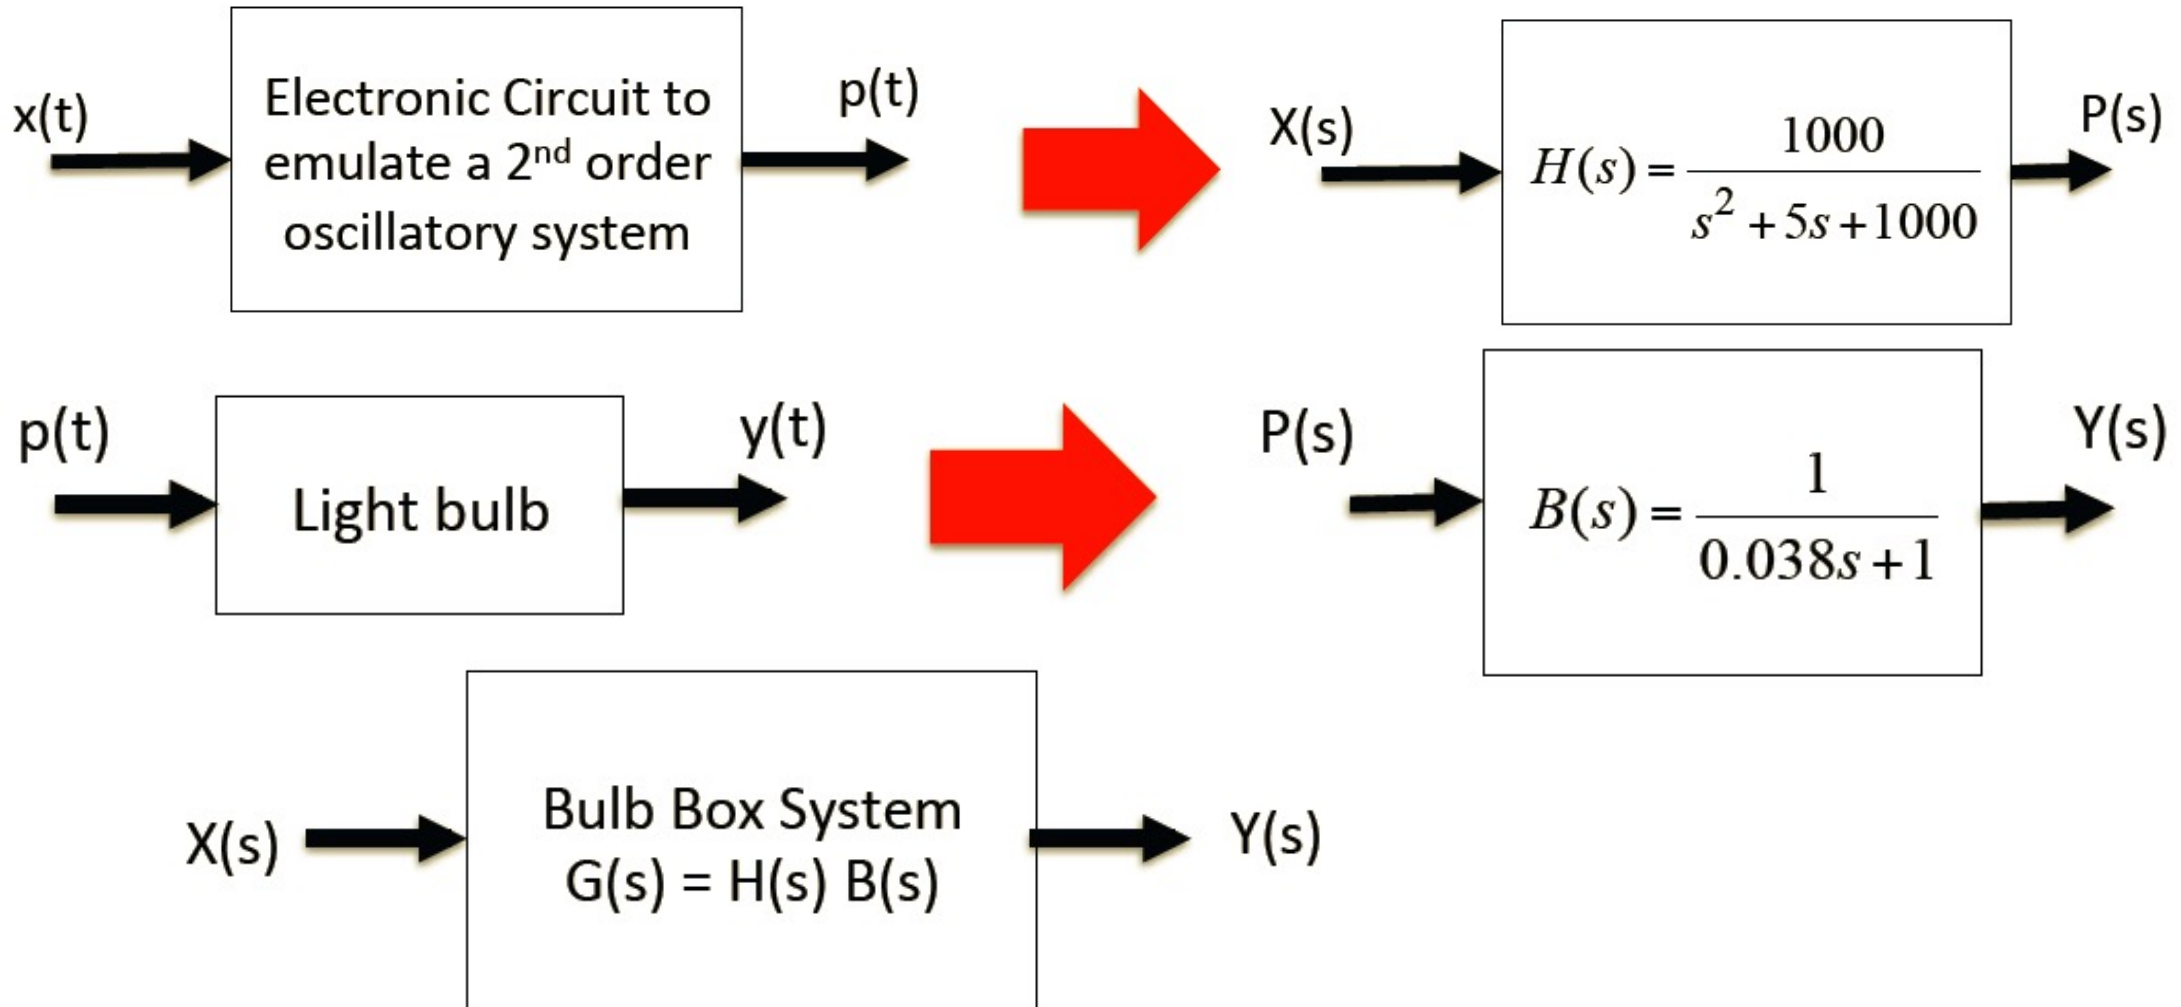

$$G(s) = \frac{1000}{0.038s^3 + 1.19s^2 + 43s + 1000}$$


Task 2 – Predict the frequency response

```
1   % Lab 3 Task 2 – Plot theoretical freq. response of Bu
2 -   f = (0:0.1:20);
3 -   D = [0.038 1.19 43 1000];   % specify denominator
4 -   s = 1i*2*pi*f;             % s = jw (1i is sqrt(-1))
5 -   G = 1000./abs(polyval(D,s)); % polynomial evaluation
6 -   Gdb = 20*log10(G);         % Gain in dB
7 -   figure;
8 -   plot(f,Gdb);
9 -   xlabel('Frequency (Hz)');
10 -  ylabel('Gain (dB)');
11 -  title('Frequency Response – Theoretical');
```

$$G(s) = \frac{1000}{0.038s^3 + 1.19s^2 + 43s + 1000}$$


Task 2 – Predict the frequency response

$$G(s) = \frac{1000}{0.038s^3 + 1.19s^2 + 43s + 1000}$$

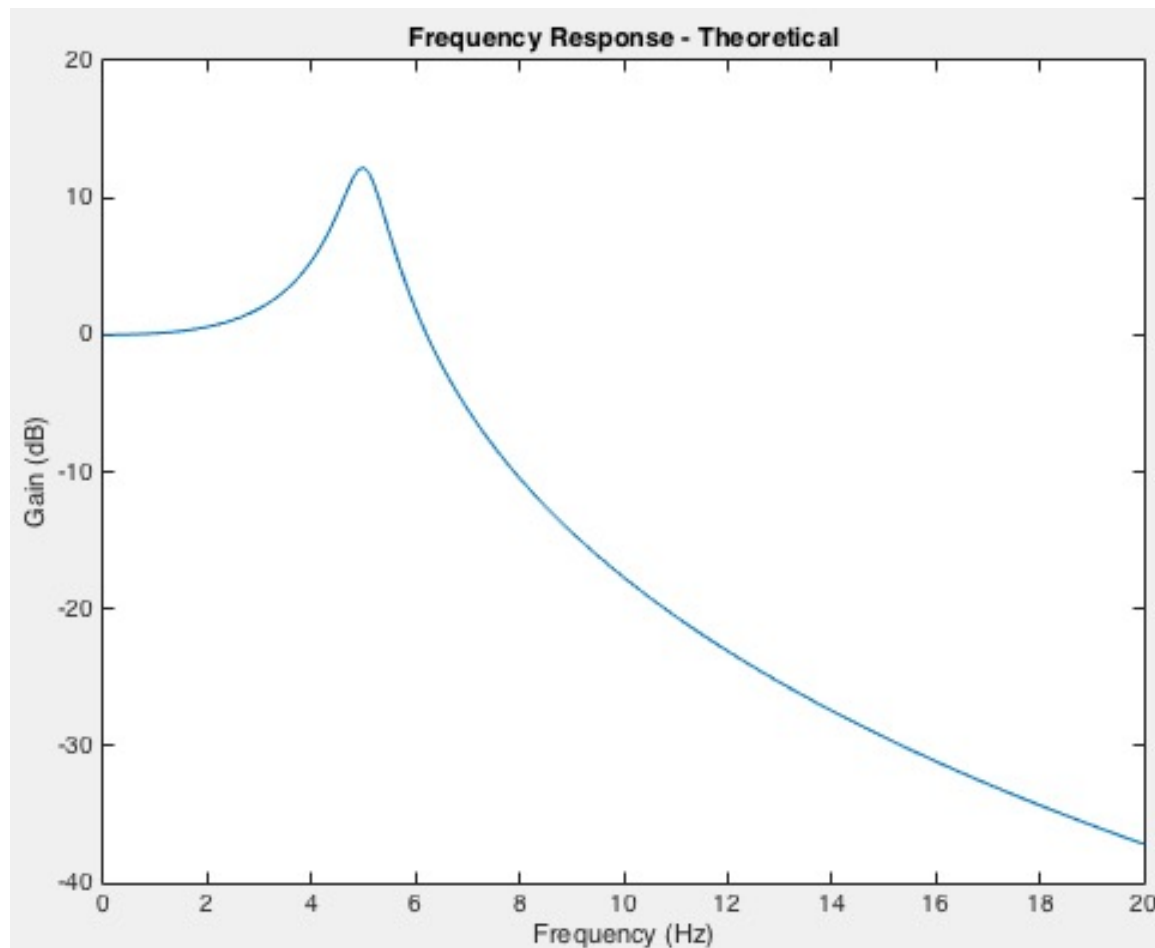


Task 3 – Measure Real Gain at 5Hz

```
7 % Generate a sine wave at sig_freq Hz
8 - max_x = 1.55;
9 - min_x = 1.45;
10 - f_sig = 5.0;
11 - pb=pb.set_sig_freq(f_sig);
12 - pb=pb.set_max_v(max_x);
13 - pb=pb.set_min_v(min_x);
14 - pb.sine();
15 - pause(2)
16 % Capture output y(t)
17 - pb=pb.set_samp_freq(100); %
18 - N = 300; % no of samples
19 - y = pb.get_block(N);
20 % plot signal
21 - plot(y);
22 - xlabel('Sample no. ');
23 - ylabel('Output voltage');
24 - title('Bulb Box output (V)');
25 % Compute Gain
26 - x_pk2pk = max_x - min_x;
27 - y_pk2pk = max(y) - min(y);
28 - G = y_pk2pk/x_pk2pk
29 - G_dB = 20*log10(y_pk2pk/x_pk2pk)
```

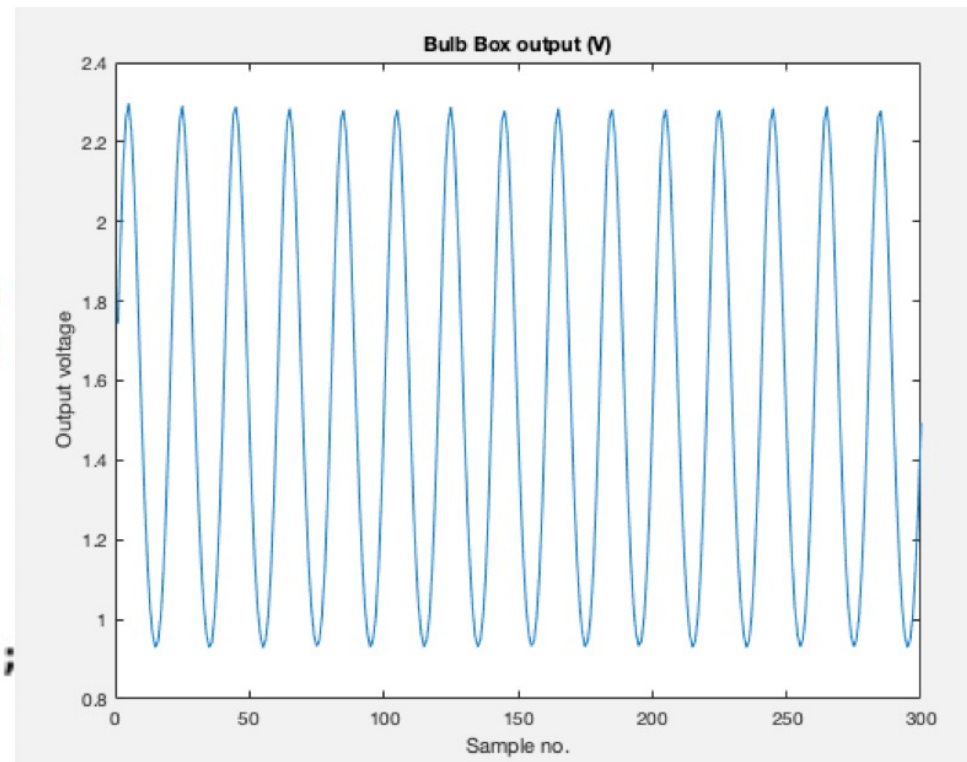


G =
13.6802
G_dB =
22.7218


Task 3 – Theory vs Measurements

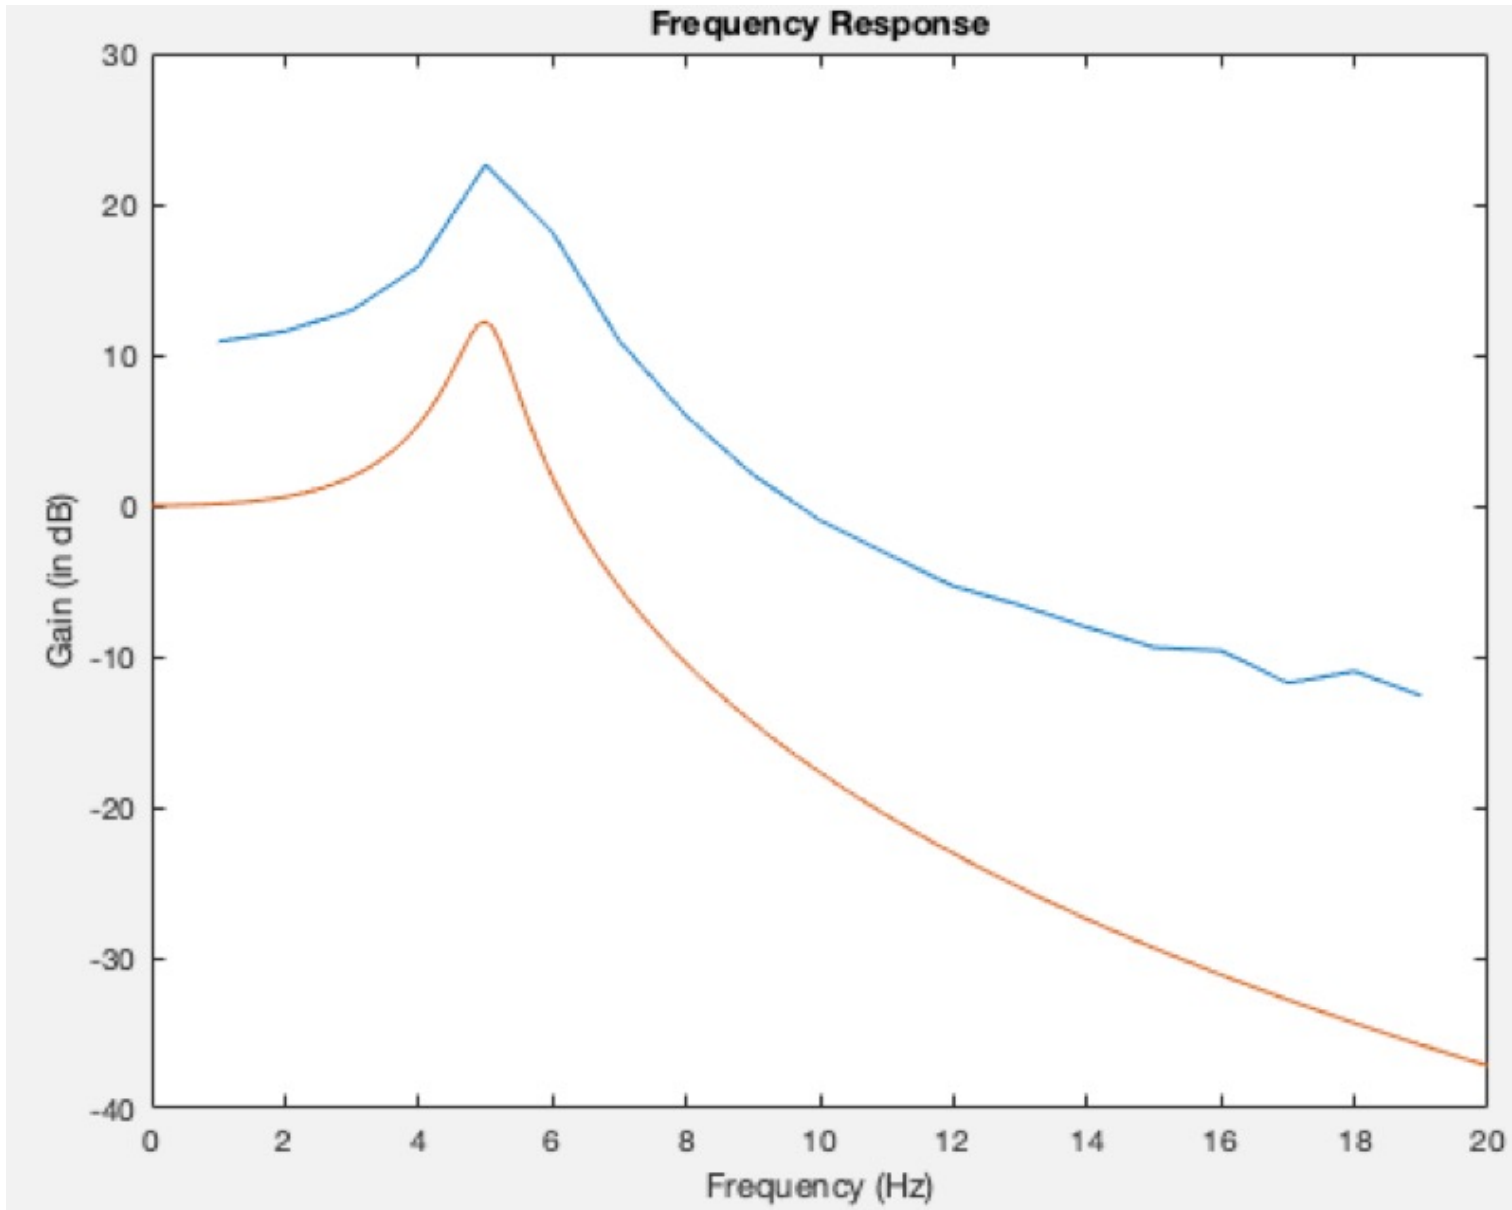



Task 3 – Explain theory vs practice

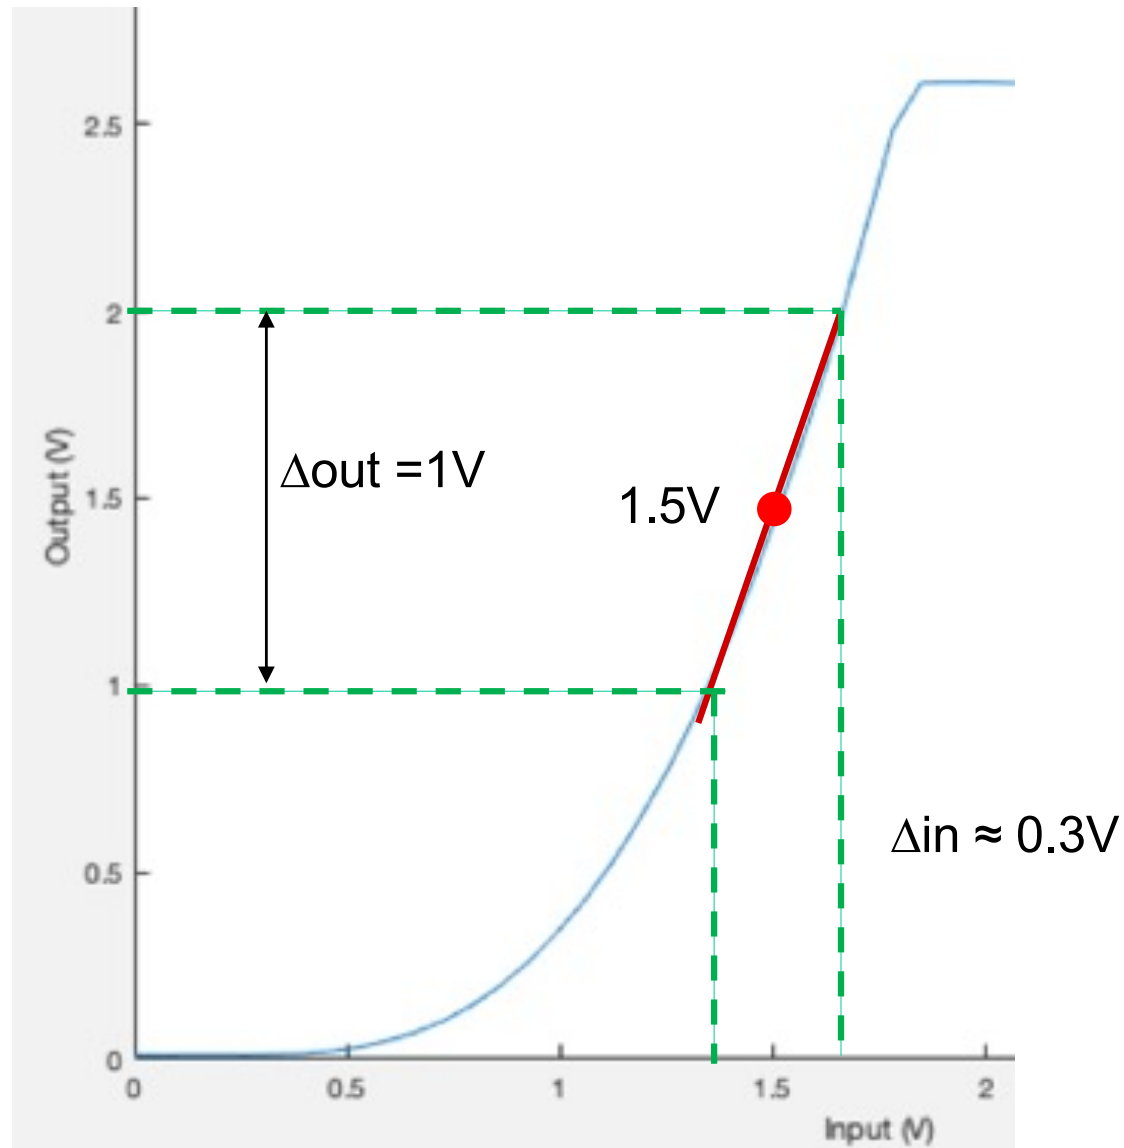

Task 4 – Step Response

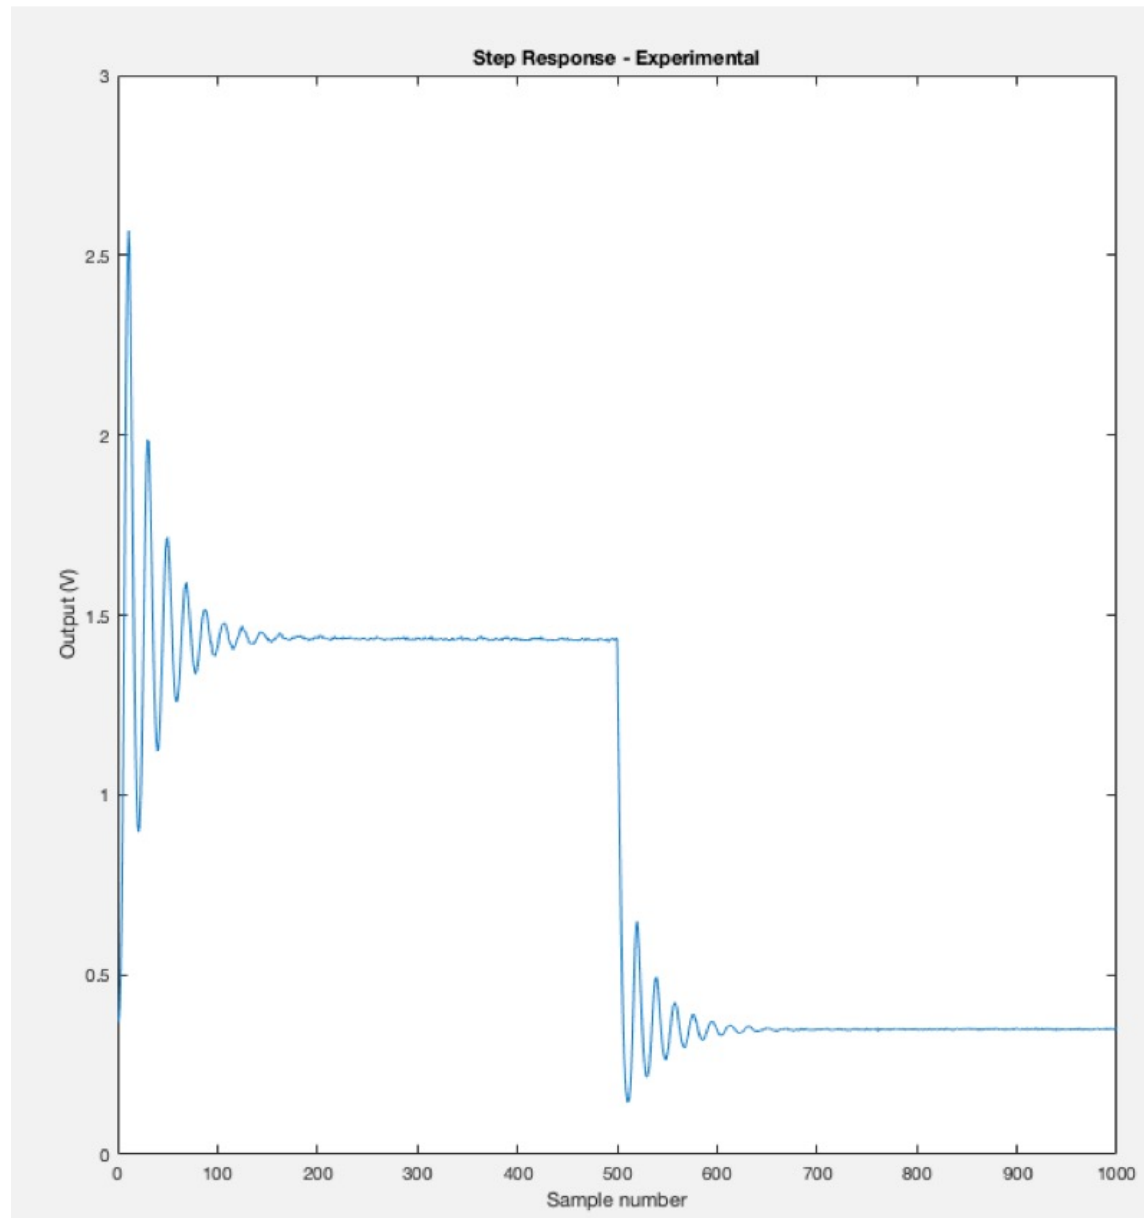

Task 4 – Explained

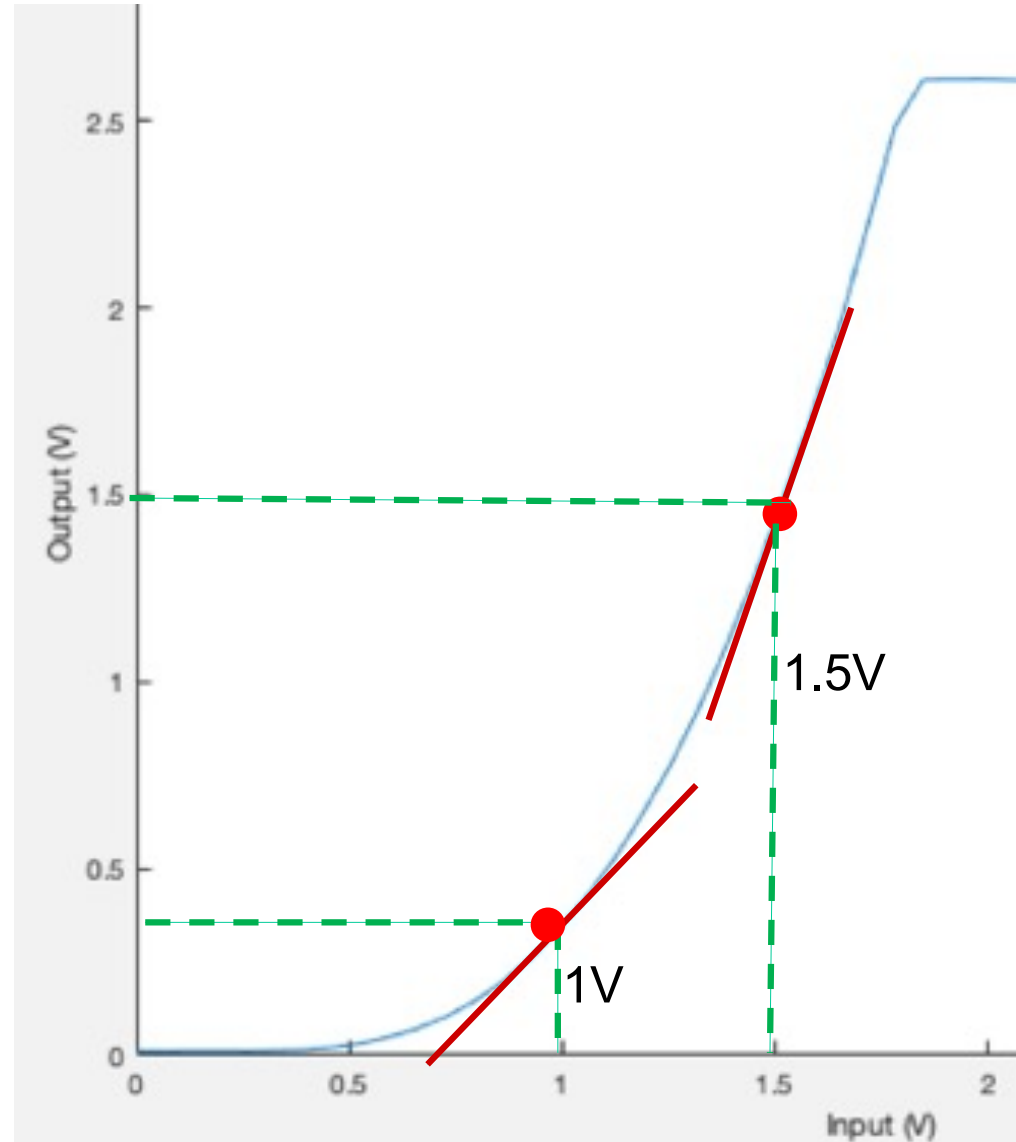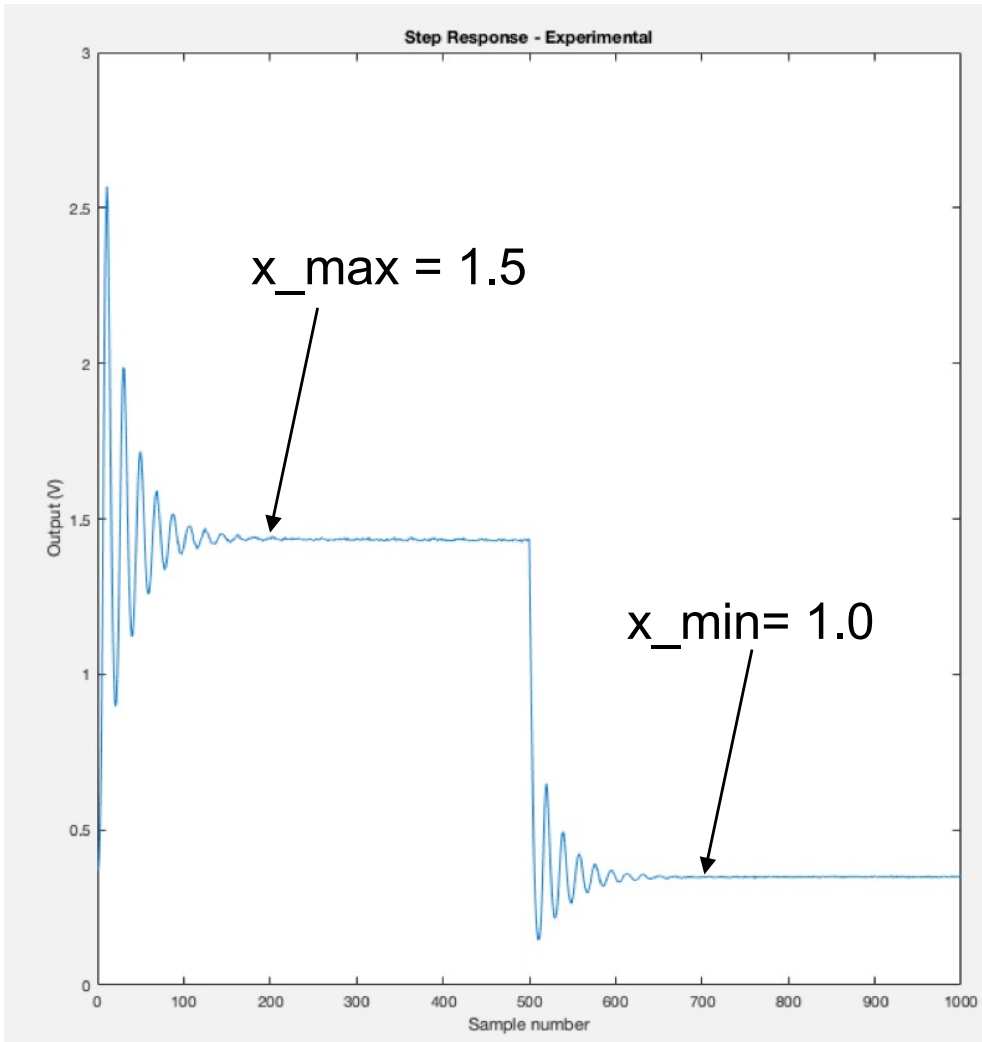

DRAW Week Lab Oral

Performance on the Lab Experiments

1. Logbook Quality and Effectiveness

[Progress bar]				
Highly effective	Effective	OK	Weak	Poor

2. Ability to answer questions from the logbook

[Progress bar]				
Excellent	Good	OK	Poor	Very poor

3. Effort to completing Lab 1 to 3

[Progress bar]				
Fully engaged Strong evidence	Good engagement Good evidence	Acceptable Engagement	Below expected Engagement	V. poor Engagement

Understanding and Learning Outcomes

5. Understanding of experimental setup (i.e. Pybench, Matlab etc.)

[Progress bar]				
Excellent	Good	OK	Poor	Very poor

5. Explanation on theories behind experiments

[Progress bar]				
Excellent	Good	OK	Poor	Very poor

6. Examiner's opinion on candidate's depth of understanding in general

[Progress bar]				
Broad & deep	Good	Average	Less than average	Poor